

BRICK PAVER

mutual materials
burgundy "mica - tile"

DEEP TOOL JOINTS SHALL LINE UP WITH JOINTS IN CURB

5 rows of brick with 1/2" grout seams. provide expansion at max. 30' intervals.



5' X 5' NOM. TREE WELL

DEEP TOOL JOINT 1/4 OF THICKNESS OF CONCRETE

A


A

SIDEWALK CROSS SECTION A-A

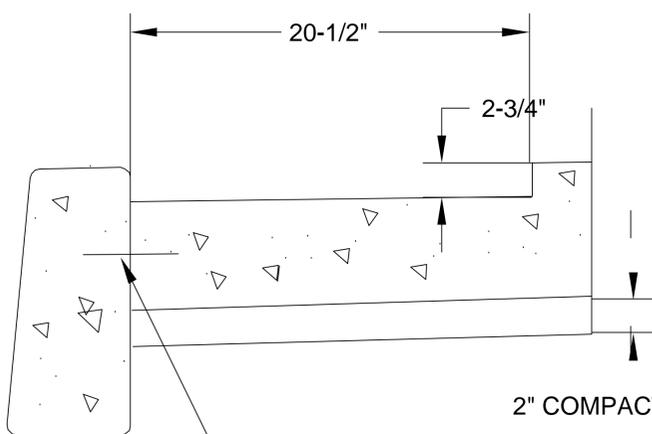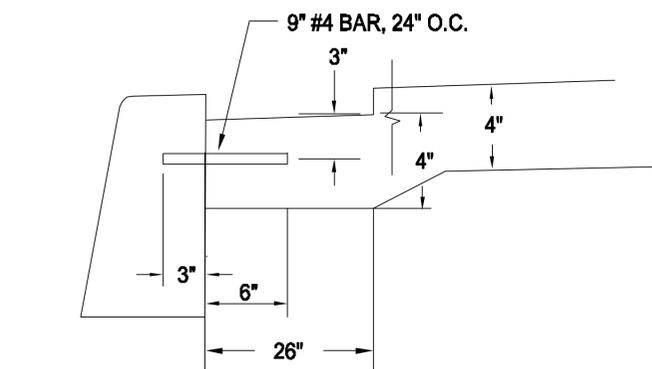


DOWEL SIDEWALK TO CURB PER STANDARD DETAIL FOR DOWELING SIDEWALKS

USE MORTAR BED TO ADJUST BRICKS FLUSH TO TOP OF CURB AND SIDEWALK

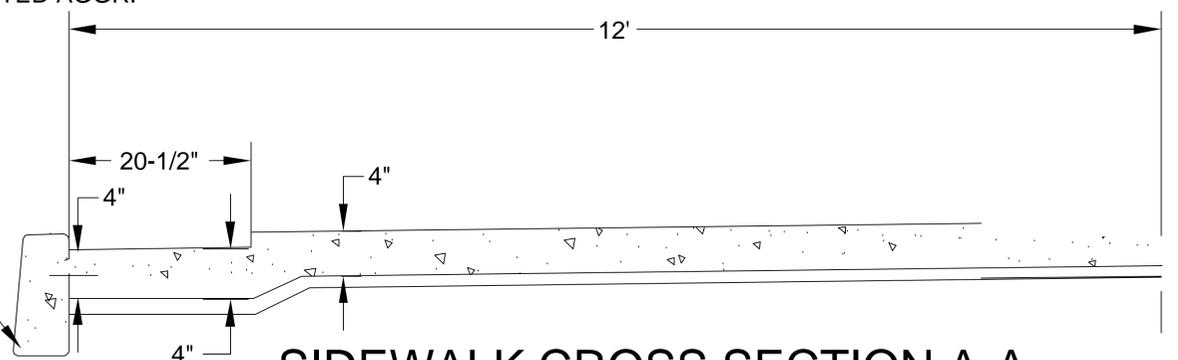

NOTES:

1. CONCRETE TO REACH STRENGTH OF 3000 P.S.I. IN 28 DAYS 2" TO 4" SLUMP.
2. EXPANSION JOINTS TO BE PLACED AT SIDES OF DRIVEWAY APPROACHES, UTILITY VAULTS & AT SPACING NOT TO EXCEED 90' OR AS DIRECTED BY THE ENGINEER.
3. FOR SIDEWALKS ADJACENT TO THE CURB & POURED AT THE SAME TIME AS THE CURB . THE JOINT BETWEEN THEM SHALL BE A TROWELED JOINT WITH A MIN. 1/2" RADIUS.
4. DRAIN BLOCKOUTS IN CURBS SHALL BE EXTENDED TO BACK OF SIDEWALK WITH 3" DIA. SCH. 40 ABS OR PVC PIPE AT 2% SLOPE, CONTRACTION JOINT TO BE PLACED OVER PIPE.

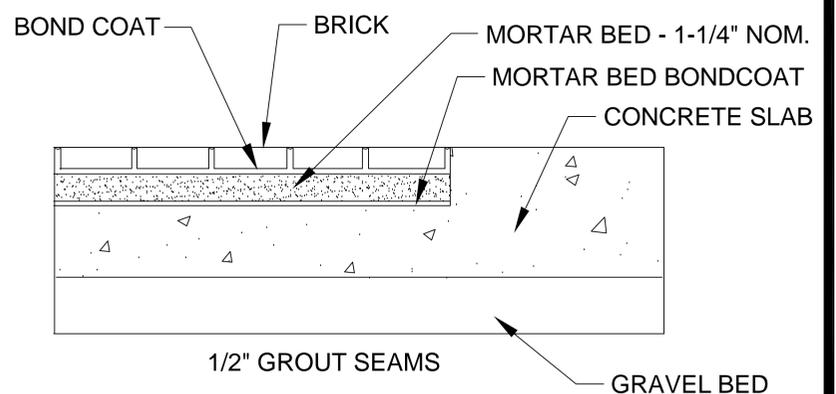

**DOWNTOWN
BRICK SIDEWALK**

**ENGINEERING
DEPARTMENT**
1924 COUNCIL STREET
P.O. BOX 326
FOREST GROVE, OR 97116

