



ALL GUIDE, WARNING, STREET NAME SIGNS
WILL BE FACED WITH 3M # 3930
SERIES HIGH INTENSITY PRISMATIC (HIP)

SCHOOL ZONE SIGNS IN THE FLUORESCENT
YELLOW GREEN WILL BE FACED WITH
3M 4000 SERIES VIP DIAMOND GRADE
(DG CUBED).

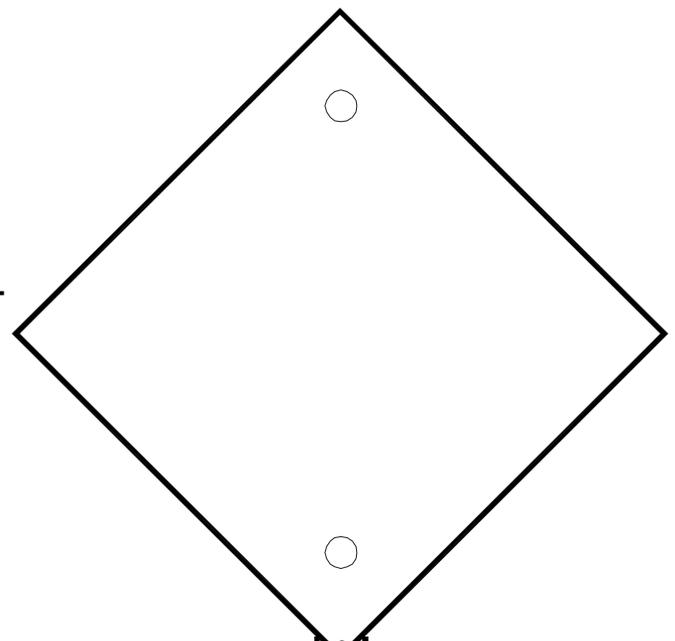

2" GALVANIZED SQUARE
BREAKAWAY STYLE
12 GAUGE THICKNESS
PERFORATED OR QWIK PUNCH.
LENGTH DETERMINED BY
EACH LOCTION.

SLEEVE: 2 1/2" GALVANIZED SQUARE
12 GAUGE PERFORATED OR QWIK PUNCH
18" MINIMUM LENGTH

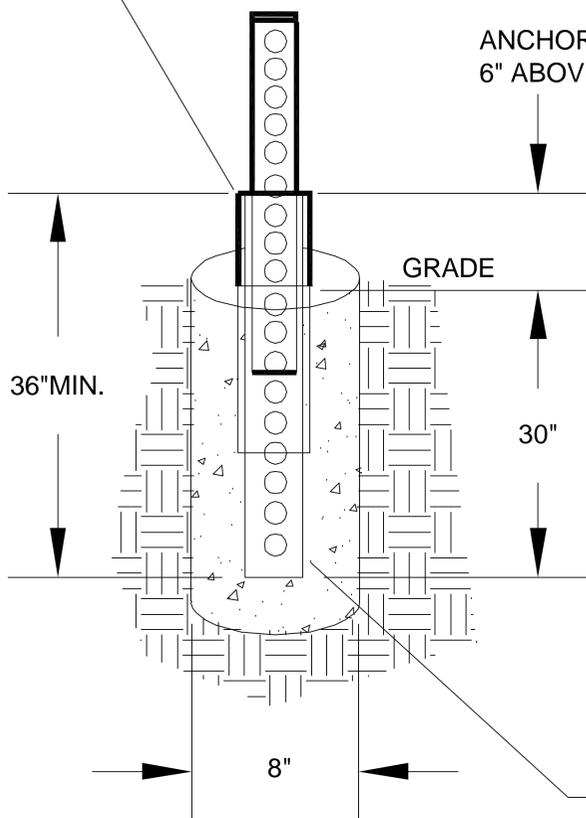

ANCHOR TO EXTEND
6" ABOVE CONCRETE

GRADE

36"MIN.

30"

8"

ANCHOR 12 GAUGE
36"MIN LENGTH 2-1/4"
GALVANIZED SQUARE BREAKAWAY
STYLE PERFORATED OR QUIK
PUNCH TYPE V-LOCK ANCHORING
SYSTEM ALSO ACCEPTABLE.

BOTTOM OF SIGNS SHALL
BE 7 FEET FROM GROUND

1' MIN. TO BE INSERTED
INTO THE ANCHOR

GRADE

NOTES:

ANCHOR SHALL BE BURIED IN GROUND 30"
WITH 6" REMAINING ABOVE GRADE LEVEL.
ANCHOR SHALL BE SET IN 8" DIAMETER
CONCRETE FOOTING.
SIGN POST SHALL BE INSTALLED IN ANCHOR
MINIMUM OF 1 FOOT.

SIGNING DETAILS

ENGINEERING
DEPARTMENT
1924 COUNCIL STREET
P.O. BOX 326
FOREST GROVE, OR 97116

