


ALL GUIDE, WARNING, STREET NAME SIGNS  
WILL BE FACED WITH 3M # 3930  
SERIES HIGH INTENSITY PRISMATIC (HIP)

SCHOOL ZONE SIGNS IN THE FLUORESCENT  
YELLOW GREEN WILL BE FACED WITH  
3M 4000 SERIES VIP DIAMOND GRADE  
(DG CUBED).

ANCHOR 12 GAUGE  
36" MIN LENGTH 2-1/4"  
GALVANIZED SQUARE BREAKAWAY  
STYLE PERFORATED OR QUIK  
PUNCH TYPE V-LOCK ANCHORING  
SYSTEM ALSO ACCEPTABLE.

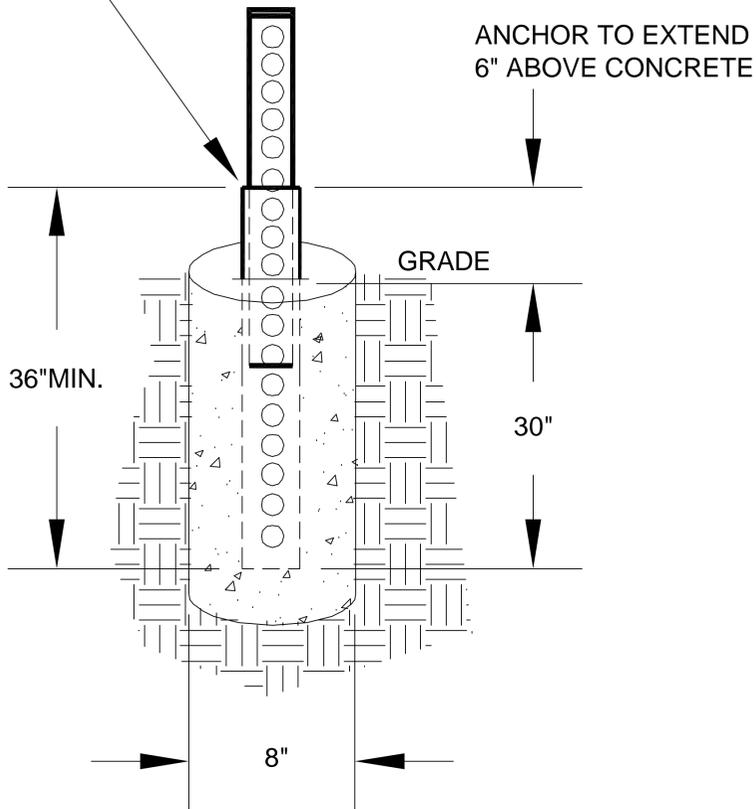

2" GALVANIZED SQUARE  
BREAKAWAY STYLE  
12 GAUGE THICKNESS  
PERFORATED OR QWIK PUNCH.  
LENGTH DETERMINED BY  
EACH LOCTION.

1' MIN. TO BE INSERTED  
INTO THE ANCHOR

BOTTOM OF SIGNS SHALL  
BE 7 FEET FROM GROUND

NOTES:

ANCHOR SHALL BE BURIED IN GROUND 30"  
WITH 6" REMAINING ABOVE GRADE LEVEL.  
ANCHOR SHALL BE SET IN 8" DIAMETER  
CONCRETE FOOTING.  
SIGN POST SHALL BE INSTALLED IN ANCHOR  
MINIMUM OF 1 FOOT.

# SIGNING DETAILS (ALTERNATE)

ENGINEERING  
DEPARTMENT  
1924 COUNCIL STREET  
P.O. BOX 326  
FOREST GROVE, OR 97116

